



Brick Dentil Course Detail 1:5




Brick Dentil Course Section Detail 1:5

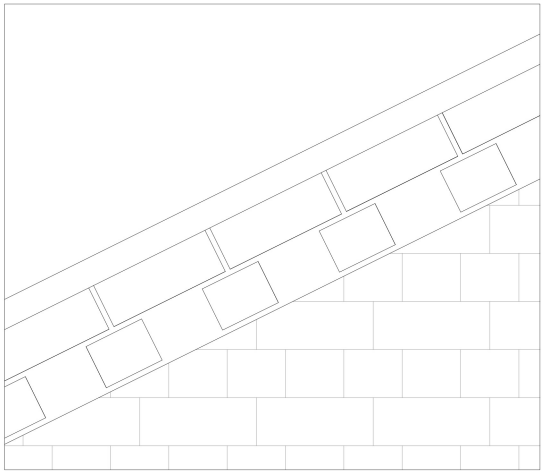


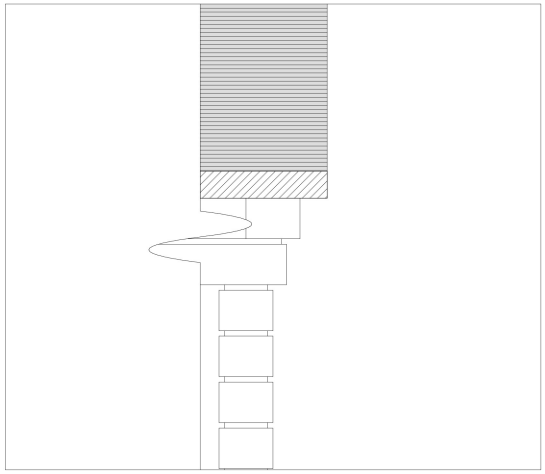


Existing Brick Dentil Course Detail



Proposed Baluster Detail 1:5

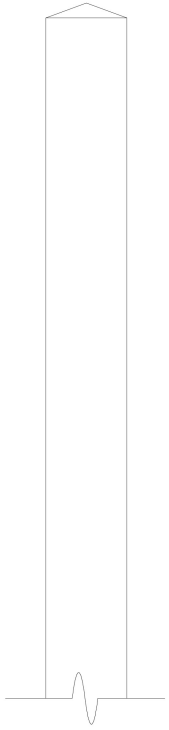

Proposed Newel Detail 1:5



Proposed Handrail Section Detail 1:1

Rev	Date	Detail	Initial
I	07/26	Additional Info	L.F.
H	07/26	Additional Info	L.F.
G	06/26	Additional Info	L.F.
F	06/26	Dismantled Stonework indicated	SIH
E	03/26	Additional Info	L.F.
D	03/26	Additional Info	A.W.
C	03/26	Additional Info	D.J.E.
B	03/26	Additional Info	D.J.E.
A	03/26	Additional Info	L.F.

Project:
Proposed Alterations at Pickhill Farm, Cross Lanes, Wrexham, LL13 OUL

Title: Proposed: Details

Scale: (A1) 1:1 & 1:5

Drawn By: L. Fowles

Date: July 2026

Drawing No: JL195/009

Sheet: 9 of 9

Key

- Proposed Lime Rendered wall finish
- Floor level to be lowered by 150mm.
- Existing Timber elements within walls
- New 100mm studwork partition walls with plasterboard panels and plaster skim
- New insulated Partitions to comprise of: 25mm wood wool board with lime plaster skim Thermafleece or similar insulation to void.

blueprint architectural services
Office 3K4,
Redwither Business Tower,
Wrexham. LL13 9XT
Tel: 01978 356500
www.blueprintarchitectural.com
partner LABC
© copyright all rights reserved