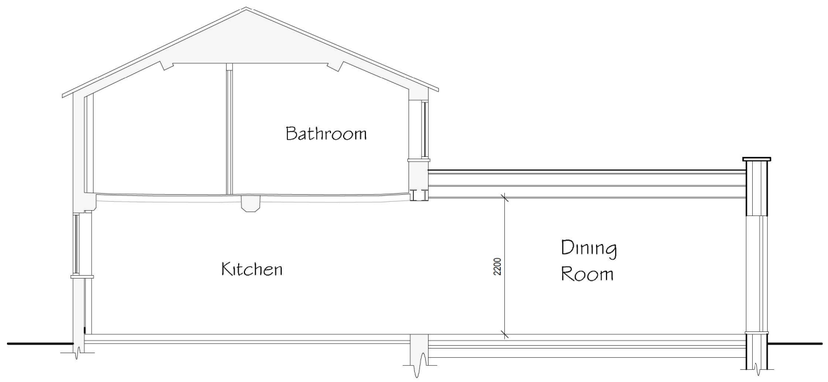
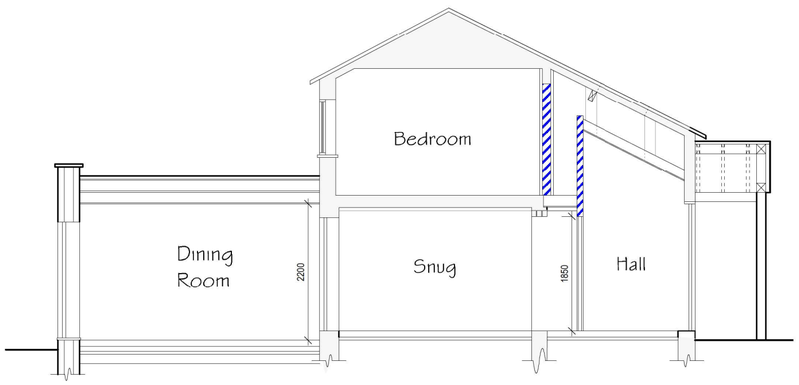
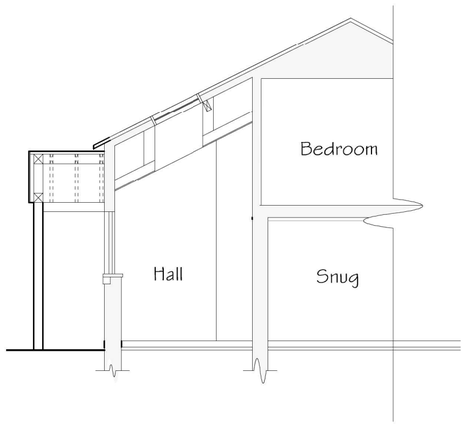


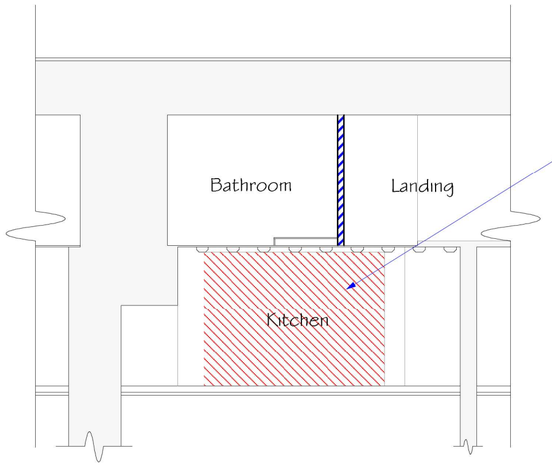

Proposed Section Y-Y 1:50




Proposed Section Z-Z 1:50




Proposed Section A-A 1:50




Proposed Section X-X 1:50

Key

- Proposed Lime Rendered wall finish
- Floor level to be lowered by 150mm.
- Existing Timber elements within walls
- New 100mm studwork partition walls with plasterboard panels and plaster skim
- New insulated Partitions to comprise of: 25mm wood wool board with lime plaster skim Thermafleece or similar insulation to void.

| Rev | Date | Detail | Initial |
|---|---|---|---|
| K | 08/26 | Additional Info | L.F |
| J | 08/26 | Additional Info | L.F |
| I | 07/26 | Additional Info | L.F |
| H | 07/26 | Additional Info | L.F |
| G | 06/26 | Additional Info | L.F |
| F | 06/26 | Dismantled Stonework indicated | SIH |
| E | 03/26 | Additional Info | L.F |
| D | 03/26 | Additional Info | A.W |
| C | 03/26 | Additional Info | D.J.E. |
| B | 03/26 | Additional Info | D.J.E. |
| A | 03/26 | Additional Info | L.F |

Project:
Proposed Alterations at Pickhill Farm, Cross Lanes, Wrexham, LL13 0UL

Title: Planning: Sections

Scale: (A1) 1:50

Drawn By: S Hatherall

Date: Feb 2026

Drawing No: JL195/009

Sheet: 7 of 9

blueprint
architectural services
partner LABC
Office 3K4,
Redwither Business Tower,
Wrexham. LL13 9XT
Tel: 01978 356500
www.blueprintarchitectural.com
© copyright all rights reserved